



TRUCK PURCHASE ORDER

4100 S. Transport St

Boise ID 83705

(866) 717-2668

www.kenworthsalesco.com

PURCHASER'S NAME		Canyon County Landfill Sourcewell Contract # 032824-KTC				DATE		10/31/2025	
PURCHASER'S ADDRESS		15500 Missouri Ave				LICENSE # (INDIVIDUAL)		CELL PHONE	
CITY, STATE & ZIP		Nampa, ID. 83686				TAX ID # (BUSINESS)		BUS. PHONE 208-466-7288	
EMAIL		Member# 68696				LOCALITY (CITY/CO.)			
VEHICLE						CASH DELIVERED PRICE OF VEHICLE		\$ 187,625.00	
PURCHASER HEREBY ORDERS THE FOLLOWING VEHICLE: ☒ NEW ☐ USED ☐ DEMO						ADDITIONAL EQUIPMENT (Options)			
☒ TRUCK ☐ TRAILER						FET Exempt		NA	
YEAR	2026	MAKE	KW	MILEAGE	0				
MODEL	T880	STOCK NO.				Price includes PTO and Pump for body			
COLOR	White	BODY TYPE	Roll Off Truck Chassis			equipment installed by Mixer Feeders.			
VIN			ENG. TYPE	X15-Allison Auto					
ESTIMATED DELIVERY DATE	Q1 2026	SALESMAN	Kevin Kratzberg						
ACTUAL DELIVERY DATE									
CUSTOMER INITIAL UPON DELIVERY									
IF NEW VEHICLE SALE: The sole warranty applying to the Vehicle are those offered by the manufacturer.									
IF USED VEHICLE SALE: CHECK APPROPRIATE BOX						CASH PRICE OF VEHICLE & ACCESSORIES		\$ 187,625.00	
☐ AS IS: The Vehicle is sold "as is" without any warranty. The purchaser will bear the entire expense of repairing or correcting any defects that presently exist or that may occur in the Vehicle.						DOC FEE		\$ 200.00	
OR						REGISTRATION			
☐ The sole Dealer Warranty on this vehicle is the Limited Warranty issued with and made a part of this order form.						SALES TAX			
USED VEHICLE CONTRACTUAL DISCLOSURE: The information disclosed on the form posted in the window of the Vehicle is part of this agreement. Information on the form overrides any contrary provisions in the contract of sale.						OTHER FEES			
USED VEHICLE TRADED AND/OR OTHER CREDIT									
YEAR		MAKE		MILEAGE					
MODEL		BODY TYPE				TOTAL PRICE OF UNIT		\$ 187,825.00	
COLOR		FINISH				# OF UNITS	1	GRAND TOTAL PRICE	\$ 187,825.00
VIN		ENG. TYPE				TOTAL CREDIT (Transferred from Left Column)		\$ -	
BALANCE OWED TO						UNPAID CASH BALANCE DUE ON DELIVERY		\$ 187,825.00	
ADDRESS						FOR "AS IS" SALE ONLY: I UNDERSTAND THAT THIS VEHICLE IS BEING SOLD "AS IS" WITH ALL FAULTS AND IS NOT COVERED BY ANY DEALER WARRANTY. I UNDERSTAND THAT THE DEALER IS NOT REQUIRED TO MAKE ANY REPAIRS AFTER I BUY THIS VEHICLE. I WILL HAVE TO PAY FOR ANY REPAIRS THIS VEHICLE WILL NEED.			
USED TRADE-IN ALLOWANCE									
BALANCE OWED ON TRADE-IN									
NET ALLOWANCE ON USED TRADE-IN			\$ -						
DEPOSIT OR CREDIT BALANCE									
CASH WITH ORDER									
TOTAL CREDIT (Transfer to Right Column)				\$ -		DATE		SIGNATURE	
NO LIABILITY INSURANCE INCLUDED UNLESS SPECIFICALLY INDICATED									
If this transaction is to be a retail installment sale, this contract is not effective unless financing is obtained on terms satisfactory to the parties, and the credit terms disclosure statement is fully completed. Until made effective, this order is not binding and purchaser may cancel and recover deposit.									
SECURITY AGREEMENT: Purchaser hereby grants Seller, its successors and assigns, a security interest in the motor vehicle, equipment and accessories to be purchased pursuant to this agreement, and such security interest shall remain in effect until all sums due hereunder have been paid in full. The undersigned acknowledges receipt of a complete copy of this agreement, comprised of pages 1 - 5 of this Purchase Order, together with documents referenced herein. The undersigned hereby certifies that (s)he is 18 years of age or older and has read and understands sections 19 - 22 of this agreement.									
I/WE UNDERSTAND THESE CONDITIONS AS REVIEWED.						Purchaser's Initials			
Date		Dealership Representative's Signature				Date		Purchaser's Signature	



KENWORTH

KENWORTH SALES COMPANY - BOISE (B340)
4100 SOUTH TRANSPORT ST.
BOISE, Idaho 83705

CANYON COUNTY
15500 MISSOURI AVE
NAMPA, Idaho 83686
United States of America

Kevin Kratzberg
Cell Phone: 208.899.2826
Office Phone: 208-345-6410
Email: kkratzberg@kwsco.com

Kirk McGee
Cell Phone: 208-991-8978
Office Phone: 208-466-7288
Email: kmcgee@canyonco.org

Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	16000
Type:	FULL TRUCK	Rr Axle Load (lbs):	46000
Description 1:	Canyon County Roll Off	G.C.W. (lbs):	62000
Description 2:	CC Solid Waste		
Application		Road Condition:	
Intended Serv.:	Linehaul: Vehicles (trucks or tractors)	Class A (Hwy/Mt):	85
Commodity:	General Freight	Class B (Hwy/Mt):	10
		Class C (Off-Hwy):	5
		Class D (Road):	0
Body		Maximum Grade:	6
Type:	Flatbed	Vehicle Use (in):	276
Length (ft):	15	Overhang (in):	55
Height (ft):	13.5	Fr Axle to BOC (in):	74
Max Laden Weight (lbs):	60000		
Trailer		Cab to Axle (in):	202
No. of Trailer Axles:	0	to EOF (in):	257
Type:		Overall Comb. Length (in):	379.5
Length (ft):	0		
Height (ft):	0	Special Req.	
Kingpin Inset (in):	0	U.S. Domestic Registry, 50-state.	
Corner Radius (in):	0		
Resolutions			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

Price Level: August 1, 2025
Deal: Canyon County Roll Off
Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025
Quote Number: QUO-1023755-P4N6S5



KENWORTH

Std/ Opt	Description	Weight
Model		
S	T880 Series Conventional	15,549
S	T880	0
O	Chassis Operation Will Not Incl. Stationary application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	0
O	CARB Low NOX Omnibus Registration Guidelines Dealer/Customer acknowledges that this vehicle is NOT intended for registration or domicile/primary use in the State of California.	0
O	EPA Clean Idle Label - Cummins Engines	0
S	Non-Sleeper w/ Rear Axle Capacity less than 39K.	0
O	State of Registry: Idaho	0
Engine & Equipment		
O	Cummins X15 500V 500@1900 1800@900 324 with Inte Brake, Productivity Series N09420 C333 0.....Reserve Speed Limit Off (C333) N09380 C334 0.....Maximum Cycle Distance (C334) N09360 C400 252.....Reserve Speed Function Reset N09200 C399 100.....Standard Maximum Speed Limit N09400 C401 0.....Maximum Active Distance (C401) N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 65.....Maximum Accelerator Pedal Velocity N09500 NO.....Engine Protection Shutdown (N09500) N09460 C231 0.....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO.....Idle Shutdown Manual Override N09480 C132 1400.....Max PTO Speed (C132) N09700 C128 65.....Maximum Cruise Speed (C128) N09500 C239 NO.....Cruise Control Auto Resume (N09500) N09520 C380 0.....Auto Engine Brake in Cruise N09240 C200 100.....Hard Maximum Speed Limit (C200) N09780 C190 80.....High Ambient Temperature Throttle N09740 C188 40.....Low Ambient Temperature Throttle N09760 C189 60.....Intermediate Ambient Temperature N09720 C382 YES.....Enable Hot Ambient Automatic N09600 C396 YES.....Enable Impending Shutdown Warning N09620 C397 60.....Timer For Impending Shutdown N09640 C206 35.....Engine Load Threshold (C206) N09560 C225 YES.....Enable Idle Shutdown Park Brake	470
O	EPA Emissions Warranty Engine	0

Price Level: August 1, 2025

100% Complete

Date: October 30, 2025

Deal: Canyon County Roll Off

Quote Number: QUO-1023755-P4N6S5

Printed On: 10/30/2025 12:16:54 PM



Std/ Opt	Description	Weight
S	PremierSpec	0
O	Gearing Analysis: Balance power/economy blend results.	0
O	Customer's Typical Operating Spd: 60 MPH	0
O	EWI Tracking - A2 Engine Module Chassis	0
	RegistrationYear Year of Registration: 2025	0
O	Effective VSL Setting NA	0
O	Engine Idle Shutdown Timer Disabled	0
O	Enable EIST Ambient Temp Override	0
O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0
O	Air Compressor: Cummins 18.7 CFM, Naturally Aspirated for Cummins X15 and X15N engines	0
S	Air Cleaner: Composite Firewall Mounted PACCAR Cummins Engines	0
O	Fan Hub: Horton 2-Speed for X15, X15N	0
S	Cooling module: 132" Core inches Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
O	Bug Screen: Between H	2
S	EXH: Single Can 2" RH Under with RH Single Can Vertical Tailpipe	0
O	Tailpipe: 5 in. Single 18" 45 degree curved.	0
O	Fuel Filter: Davco 2 Fuel/Water Separator	8
O	Return: Cummins TRV for Davco only *For Fuel Filter X15 AND 2.1 m models	2
S	Start Aid: Heat *For Fuel Filter	0
O	Immersion Block Heater 120V 1500W W/ Plug Under Door on C500, T660, T800 & W900.	2
S	Alternator: PACCAR HDS 160 AMP Brushed	0
O	Batteries: 4 PACCAR GP31 Threaded Post (700-730) 2800-2920 CCA dual purpose.	57
O	Mitsubishi 105P55 12V Starter with Cummins and PX PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-	0

Price Level: August 1, 2025

Deal: Canyon County Roll Off

Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025

Quote Number: QUO-1023755-P4N6S5



Std/ Opt	Description	Weight
	volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	
S	12V Low Voltage Disconnect for Battery Protection	0
O	Jump Start Terminals Under Hood.	12
O	Remote PTO/Throttle, 12-Pin, 250K, Back of Cab OR Back of Sleeper, J1939, Remote Control Provision	0
Transmission & Clutch		
O	Transmission: Allison 4000RDS 6-speed, With PTO drive gear. No retarder. 6th Generation controls. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	478
O	Driveline: 3 Dana SPL250 LITE; W/ 2 C/B	201
O	Torque Converter Included W/ Allison Transmission.	0
O	Pushbutton Control Center Console Mounted. Class 8 with Allison Transmission.	0
O	Allison Fuel Sense: Delete	0
O	J1939 Park Brake Auto Neutral	0
O	Allison Neutral at Stop	0
O	Rear Transmission Support Springs for transmission & PTO applications required to ensure that engine flywheel housing are not overloaded when transmission PTO's are installed.	0
O	Custom Installed Transmission PTO in the LH Mounted position 7/8 o'clock for Allison 3000 & 4000 transmissions.	0
O	Severe Service Rear Transmission Support Spring(s).	15
Front Axle & Equipment		
O	Meritor FS2000 3.74in. Drop Wide Track.	-37
S	Front Brakes: 14,601-22K Bendix Air Disc Brakes.	0
O	Splined Rotor for Front Air Disc Brakes for Use with Iron Hubs.	0
O	Front Hubs Iron Hub Pilot 20,000 lbs. 10 Bolt 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	80
S	ConMet PreSet Plus Hub Package; Front Axle.	0
S	Hubcap: Front Vented.	0

Price Level: August 1, 2025

Deal: Canyon County Roll Off

Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025

Quote Number: QUO-1023755-P4N6S5

**KENWORTH**

Std/ Opt	Description	Weight
S	Slack Adjusters Included W/ Front Axle or Brakes. Also use with disc brakes.	0
S	Front Springs: Taperleaf 20K W/ Shock Absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. Not available on W900L. W900B use 2866021.	0
O	Single Power Steering Gear: 16K TRW TAS85	-35
S	Power Steering Cooler: Radiator Mounted Air-to-Oil	0
Rear Axle & Equipment		
O	Dual Dana Spicer D46-172HP Rear Axle rated at 46K. w/ 16mm housing and 2.06in. shaft diameter. Includes pump. Tandem rear axles.	-156
O	Rear Axle Ratio - 4.78.	0
S	Dual Rear Bendix Air Disc Brakes for Dual rear axles to 46K capacity.	0
O	Splined Rotor for Dual Rear Air Disc Brakes for use with iron hubs.	0
O	Dual Rear Hubs: Iron Hub Pilot 1 1/4" 25" Bolt circle. Requires "R" series outer end.	104
S	ConMet PreSet Plus Hub Package Dual Rear	0
S	Rear Slack Adjusters Included W/ Air disc brakes.	0
S	Spring Brakes Included W/ Dual Rear Air Disc brakes.	0
O	Bendix 4S/4M ABS Lock W/ Air traction control (ABS)	2
O	Interchange Driveline: Dana SPL170XL Tandem Rear Axles Only	8
O	Wheel Differential Lock Dana Spicer Axles D40-170(P)/D46-170(H)(P)(WT) forward rear axle & rear rear axle.	112
O	Rear suspension: Tandem Chalmers 854-46-L-HS 46K. 54" axle spacing high center of gravity application. Unladen Height: 11.3" Laden Height: 9.6 in.	226
O	Delete Tandem Heavy-Duty Air Springs for Rear suspension.	-28
Tires & Wheels		
O	Front Tires: Michelin X Works Z 315/80R22.5 20PR	-54
S	Rear Tires: Michelin X Multi D+ 11R22.5 16PR	0
O	Rear Tire Quantity: 8	0
O	Front Wheel: Accuride 41730 22.5X9 aluminum	-20

Price Level: August 1, 2025

100% Complete

Date: October 30, 2025

Deal: Canyon County Roll Off

Quote Number: QUO-1023755-P4N6S5

Printed On: 10/30/2025 12:16:54 PM



Std/ Opt	Description	Weight
O	Rear Wheel: Accuride 51487 22.5x8.25 steel Steel Armor[TM] powder coat, hub-pilot mount. 7400lb. maximum rating. 5-hand hole. Air disc brake compatible. Code is priced per pair of wheels.	0
O	Powder Coat White Steel Wheel. Use in Conjunction with front, dual front, rear, spare or lift axle wheel code(s). All wheels on chassis must have same finish color.	0
O	Rear Wheel/Rim Quantity: 8	0
Frame & Equipment		
O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 337in. to 416 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimension specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	529
O	Full Steel Insert: for 10-5/8 in. or 10-3/4 in. Steel 337 in. to 416 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in.-lb to main rail RBM. Full insert weight is 2.5 lb.-in. per pair of rails. Full frame insert length equals wheelbase plus rear frame cutoff plus dimension forward of front axle. See databook addendum section 7.2.	722
O	Bumper: Tapered Plate Steel Chassis Requires a bumper setting code.	44
S	48.5 in. Bumper Setting. Requires a Bumper Code.	0
O	Front Tow Hook Center Requires iron front brackets.	28
O	Brake Spring Front Spring Drive. Included with front spring capacity of 1000 lbs or greater; code not required.	47
O	Custom Frame Layout: C Chassis CFL DEF: 30" Clearance outside rail behind DEF tank drivers side	0
O	Battery Box Cantilever Aluminum BOC with Painted strength aluminum cover.	10
O	Battery Box Location: RH Side.	15
S	C5, T6, T8 diamond plate cover and black end plates with access step for right hand under DPF/SCR or CNG. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	0
O	Heavy-Duty Rear Cab Supports: W/ Steel crossmembers & aluminum gussets.	26
O	Heavy-Duty BOC Crossmember Assembly.	23
O	First - LH Outside Rail Only.	0

Price Level: August 1, 2025

Deal: Canyon County Roll Off

Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025

Quote Number: QUO-1023755-P4N6S5



Std/ Opt	Description	Weight
	Clear frame space area. Does not include fasteners or piping. Requires a supplemental length and location code. The actual chassis layout will be determined at time of engineering.	
O	Directly Behind DEF Tank. First clear frame space location.	0
O	First - 30 in. Clear Frame Space Length. The impact to other frame-mounted components will be determined at time of engineering.	0
O	Customer-Installed Bulkhead and/or Headache rack.	0
O	Customer Will Install Structural End-of-Frame crossmember before vehicle is placed in service.	0
O	Delete Mudflap Arms: Dealer/ Customer Responsible for installation of arms.	-12
O	Delete Mudflap Shields-Dealer/Customer responsible for installation of shields.	-8
S	Square End-of-Frame W/O Crossmember; Non-Towing.	0
Fuel Tanks & Equip		
O	Fuel Tank: 90 US Gallon 24.5 in. Aluminum Under replace. Class 8 fuel tanks w/o local codes include an anti-siphon device on the filler neck.	-4
S	Small Round DEF Tank, 14 Gallon The DEF tank will be located on the side you specify. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0
O	6 In. Wide Low Profile Fuel Tank for One 22 In. or 24.5 in. tank LH.	2
S	DEF to Fuel Fill Ratio 1:1 or Greater.	0
S	Anti-Siphon Device in Fuel Tank Filler Neck. For any number of fuel tanks.	0
S	DEF Tank Location is LH.	0
O	Location: 90 gal fuel tank LH under cab.	0
Cab & Equipment		
S	Cab: Stamped Aluminum Cab with Panoramic Curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
O	Hood: T880 Set-Back Medium Length. 122.6 inch BBC W/Std Bumper.	15
S	Cab HVAC - Day Cab and 40 in. Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated	0

Price Level: August 1, 2025

100% Complete

Date: October 30, 2025

Deal: Canyon County Roll Off

Quote Number: QUO-1023755-P4N6S5

Printed On: 10/30/2025 12:16:54 PM



Std/ Opt	Description	Weight
	fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	
O	Shutoff Valves to Isolate Primary Heater Remote mounted on frame under cab.	0
S	Kenworth Smartwheel: 18 in. Non-Leather With Integrated Radio and Cruise Controls.	0
O	Column Mtd Retarder Control, RH Side Use with Manual & Allison Transmissions Only.	0
S	Adjustable Telescoping Tilt Steering Column.	0
O	5 Sets of Keys. Replaces Standard 2 Sets of Keys.	0
O	Delete Fan Clutch Manual Override Switch in Cab	0
O	Information for Customer-Installed PTO Mounting 10-bolt.	0
O	Dash Switch:1st Allison-Mounted PTO. Electric switch and wiring are factory-installed to control the 1st Allison Trans mounted PTO.	0
O	Two Spare Switches: Wired to PTO.	0
O	Gauge: Dash Mounted Air Filter Restriction Gauge.	0
O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	0
S	Gauge: DD Virtual Gauge - Coolant Temp Engine	0
S	Gauge: DD Virtual Gauge - Manifold Pressure	0
S	Gauge: DD Virtual Gauge - Engine Percent Torque	0
O	Gauge: Fuel Filter Restriction Gauge.	0
O	Gauge: Wheel Temperature, Dual-Drive Axle. (2 gauges) integral warning light.	0
O	Gauge: Oil Temperature Gauge Transmission. The NavPlus HD unit includes a virtual transmission oil temperature gauge.	0
S	Main Instrument Package: 15" Digital Display. Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0
O	Modular Dash Options: RH Dash Storage Unit With two shelves. Reduces total gauge count; HD by 6 and MD by 4.	0

Price Level: August 1, 2025

Deal: Canyon County Roll Off

Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025

Quote Number: QUO-1023755-P4N6S5

**KENWORTH**

Std/ Opt	Description	Weight
S	Interior Color: Slate Gray	0
S	Interior Package: Vantage Daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0
S	Rubber Floormat	0
O	Driver Seat: GT701 HB with DuraCloth material. The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrest.	0
O	Rider Seat: GT100 Toolbox IB with DuraCloth material. Material. The GT100 seats are standard with fixed seat. Includes 3-point matching seat belts. Rider seat standard w/ L armrest.	0
O	Seat Color: Gray	0
O	Driver and Rider Seat Belts: Orange Seat Belts Replacing standard color.	0
O	Delete Inboard RD Seat Armrest. Not available on GT701 seats.	0
O	Kenworth Radio: EA710 AM/FM/WB/LCD, Bluetooth	0
S	Base Level Audio System with High Performance Door Speakers.	0
O	CB Installation Kit: Center Mounted on Header. With header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	2
S	Turn Signal: Non-Interf Cancelling	0
S	LH & RH Trip Edge Rain Deflectors	0
S	Global Telematics Unit	0
O	Long Grabhandle RH Side Mounted to Side-of-Cab exhaust.	2
O	Grabhandle: LH, Exterior, Side of Cab - Ergonomic Grab Handle Mounted To The Left Hand Exterior Of The Cab For Entry and Exit.	3
S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0
S	Kenworth Daylite Door With Standard LH/RH electric door locks and LH/RH electric window controls.	0

Price Level: August 1, 2025

Deal: Canyon County Roll Off

Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025

Quote Number: QUO-1023755-P4N6S5



Std/ Opt	Description	Weight
S	Single Air Horn Under Cab.	0
S	Look-Down, Pass. Door, Black 11x6	0
O	Mirror: RH Hood Mounted, Rectangle 8x6, Chrome	4
O	Mirror: LH Hood Mounted, Rectangle 8x6, Chrome	4
S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on side door pad.	0
S	Rear Cab Stationary Window 19in x 36in	0
O	3.5in x 11.5in Plastic Records Holder: Mounted on Rear Cab Panel. Not available With Sleeper Cab Person Bench Seat.	0
S	One-Piece Bonded-In Windshield With Curved Glass Standard.	0
S	Wheelwell Fender Extension: 2.5 Inches	0
S	Kenworth Cab/Sleeper Air Suspension	0
Lights & Instruments		
S	Headlamps: SAE Dual Xenon Composite Reflector	0
S	Marker Lights: Five Rectangular LED.	0
S	Turn Signal Lights: Flush Mount LED. Mounted at top of fender wheel well.	0
S	LED Stop, Turn, Tail Light With Two LED Backup Light and With LED License Plate.	0
O	Dual Pedestal Floodlight - First Set	2
O	Floodlight Location: Located High - First Set. The Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Code Only.	0
O	Switch Wiring: Customer-Installed Beacon Lights with additional 20 ft jumper harness shipped loose.	1
O	Daytime Running Lamps.	0
O	Headlamps to Turn on When Wipers are Active.	0
S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0
S	Omit Brake Light with Engine Brake. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0

Price Level: August 1, 2025

Deal: Canyon County Roll Off

Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025

Quote Number: QUO-1023755-P4N6S5



Std/ Opt	Description	Weight
O	Reflectors: Two Midframe	0
O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	4
O	Junction Box: Mounted Behind Cab or Sleeper Not Mounted at End of Frame.	1
O	Polyswitches Replacing Fuses. Switch Will automatically reset after removal of excess load.	0
Air Equipment		
S	Air Dryer: Bendix AD-HF Puraguard Heated	0
S	Moisture Ejection Valve W/ Pull Cable Drain.	0
S	Nylon Air Tubing in Frame & Cab, Excluding Hoses subject to excessive heat or flexing.	0
Extended Warranty		
S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0
O	Allison 4000 Series Transmission - 5 Year Charge	0
O	TruckTech+ RD - 5YR Sub Cummins Engine	0
O	Base Warranty: Emission 5YR/100K MI - EPA Engine	0
Miscellaneous		
O	GHG Secondary Manifold - Not Apply	0
O	Warning Triangle Reflector Kit: Shipped Loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	4
O	5 lb. Dry Chemical Type Fire Extinguisher mounted outboard of driver seat. Class ABC.	11
S	UX Architecture	0
Promotions		
Paint		
O	Paint Color Number(s). N9702 A - L0006 WHITE N9770 BUMPER N0001 BLACK N9720 FRAME N0001 BLACK	0
O	Steel Bumper Painted Frame Color	0
O	Day Cab Bulk Paint	0

Price Level: August 1, 2025
Deal: Canyon County Roll Off
Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025
Quote Number: QUO-1023755-P4N6S5



<i>Std/ Opt</i>	<i>Description</i>	<i>Weight</i>
O	Day Cab Standard Paint	0
S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0
S	Base Coat/ Clear Coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0

Special Requirements

Special Requirement 1 0098025
Special Requirement 2
Special Requirement 3
Special Requirement 4

Order Comments

Price Level: August 1, 2025
Deal: Canyon County Roll Off
Printed On: 10/30/2025 12:16:54 PM

100% Complete

Date: October 30, 2025
Quote Number: QUO-1023755-P4N6S5



Total Weight (lbs)

18,473

Any price increase as the result of force majeure, rising costs of components (including but not limited to material shortages) or government tariffs are not included in the quoted price and will be the financial responsibility of the customer.

Prices and Specifications Subject to Change Without Notice.


Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER


While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information.

HORIZONTAL DIMENSIONS

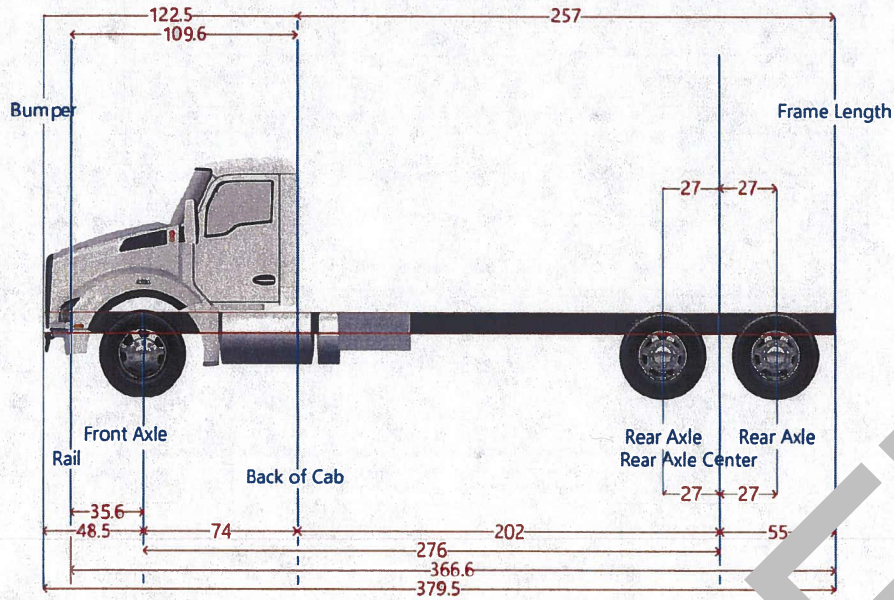

Dimension	Measurement	Start	End
Axle Spacing	54	249	303
Bumper to Back of Cab	122.5	-48.5	74
Bumper to Front Axle	48.5	-48.5	0
Bumper to Front Frame	12.9	-48.5	-35.6
Cab to End of Frame	257.0	74	331
Cab to Rear Axle	202.0	74	276
Effective Bumper to Back Of Cab	122.5	-48.5	74
Frame Length	366.6	-35.6	331
Front Axle to Back of Cab	74.0	0	74
Front of Frame to Axle	35.6	-35.6	0
Load Space	257.0	74	331
Overall Length	379.5	-48.5	331
Overhang	55.0	276	331
Pusher Offset #1	27.0	249	276
Pusher Offset #2	27.0	249	276
Pusher Offset #3	27.0	249	276
Tag Offset	27.0	276	303
Wheelbase	276	0	276

FRAME LAYOUT

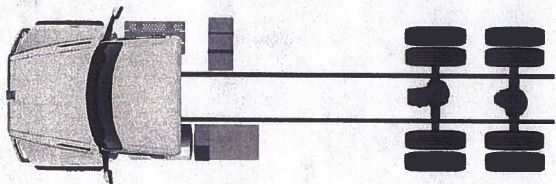

Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add Custom Frame Layout code if an exact layout is required.

Selected Options (Wheelbase: 276)

Sales Code	Description	Length	Side
7210090	Fuel Tank: 90 US Gallon 24.5 in. Aluminum Under	45.5	Left
6497330	First - 30 in. Clear Frame Space Length.	30	Left
7722153	Small Round DEF Tank 14 Gallon.	10.2	Left
6400634	Battery Box Cover Aluminum BOC with Painted	18.2	Right